

KM Series Grip

Product Features

- Ergonomic design, good handle feel
- Using Nylon makes components durable
- Deadman switch is an option

Application

Typically used in cranes, construction equipment, agricultural equipment, mining equipment. Installed on operating mechanism or pilot operated valves.



Dimensions

Environmental Data


Operating temperature	-30°C~+70°C
Storage temperature	-40°C~ +85°C
Protection level	IP65 (Above the installation panel)

Interface Information

- 0.2mm² colorful high-temperature wire;
- Normally, directly outlet without terminal.
- The wire length and determination, please refer to the attachment.
- Mechanical connector customized available.
- Special requirements please contact technical.



Product Configuration

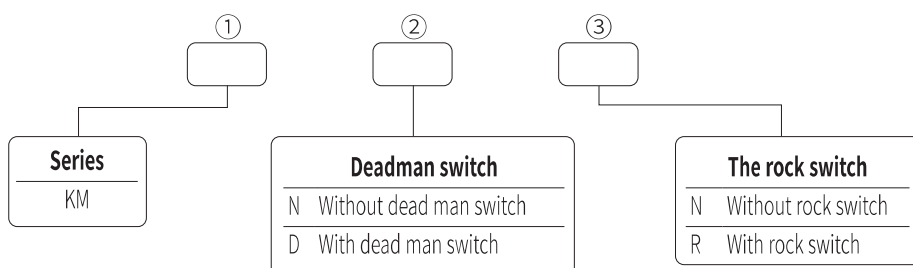

Note: If the hand grip don't have either of them, it should be KM.