

SD Series Grip

Product Features

- Overall adhesive handle, beautiful appearance.
- Panel configurable with multiple buttons (up to 3 buttons)
- Optional back button.
- Optional thumb wheel , thumb wheel is maximum with 2 panel buttons.
- Optional outgoing line way, Straight bar bend bar optional.

Application

This product is suitable for the upper end of the handle inside the excavator, It can also be installed separately on the pilot valve operating mechanism.

Environmental Data

Environmental data

Operation temperature	-30°C~+70°C
Storage temperature	-40°C~ +85°C

Interface Information


- Use 0.08*50 high-temperature wire for outgoing cables
- Optional Deutsch plug-in cable or harness tin cable
- Lower M 14 or M12 external thread connection (standard screw)



Dimensions



Product Configuration

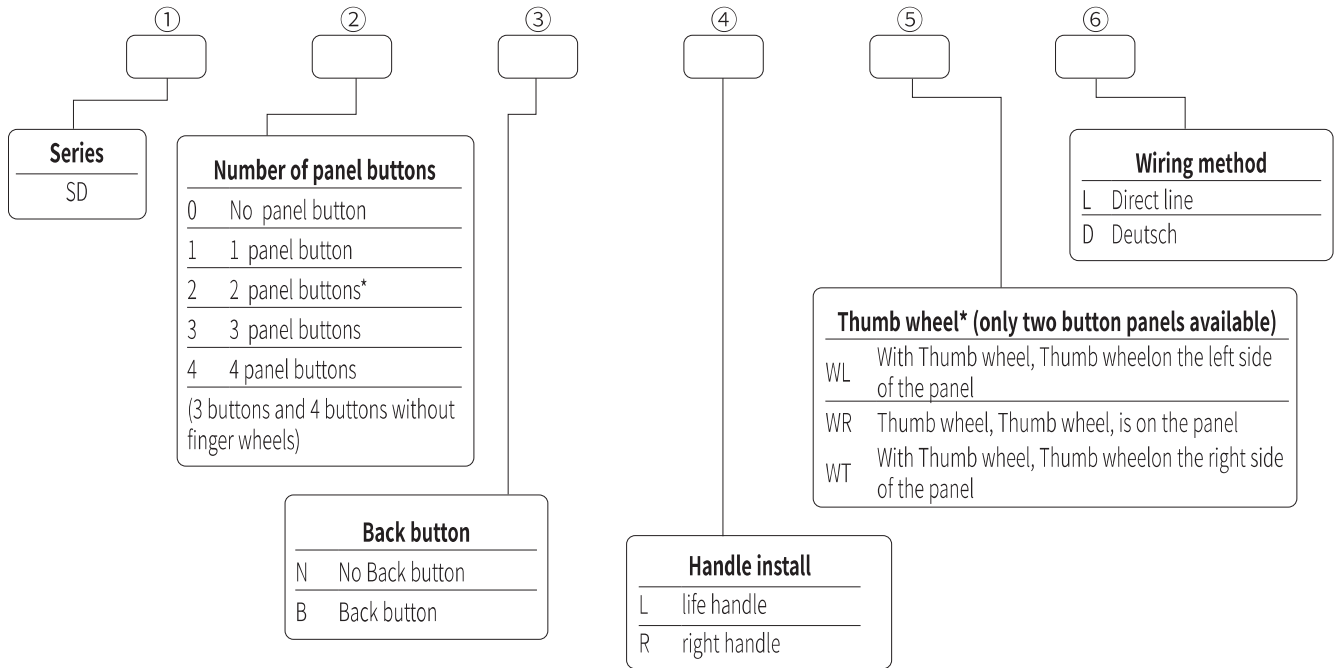

Outgoing line definition

Deutsch

Line color	Definition
Red	Thumb wheel 5Vdc
Black	Thumb wheel GND
White	Thumb wheelout
Brown	SW1
Blue	SW3
Green	SW1/3 commonport
Yellow	SW2
Gray	SW2

