

SS Series Grip

Product Features

- Ergonomic design, good handle feel
- Using Nylon makes components durable
- Various panel options
- One side switch is an option
- Dead man switch is available

Application

Typically used in cranes, construction equipment, agricultural equipment, mining equipment. Installed on operating mechanism or pilot operated valves.



Dimensions

Environmental Data


Operating temperature	-30°C~+70°C
Storage temperature	-40°C~ +85°C
Protection level	IP65 (Above the installation panel)

Interface Information

- 0.5mm² wire with number, 0.2mm² colorful high-temperature wire; Normally, directly outlet without terminal.
- The wire length and determination, please refer to the attachment.
- M12 female mechanical interface.
- Please connect with the technical leader for special requirements.



Product Configuration

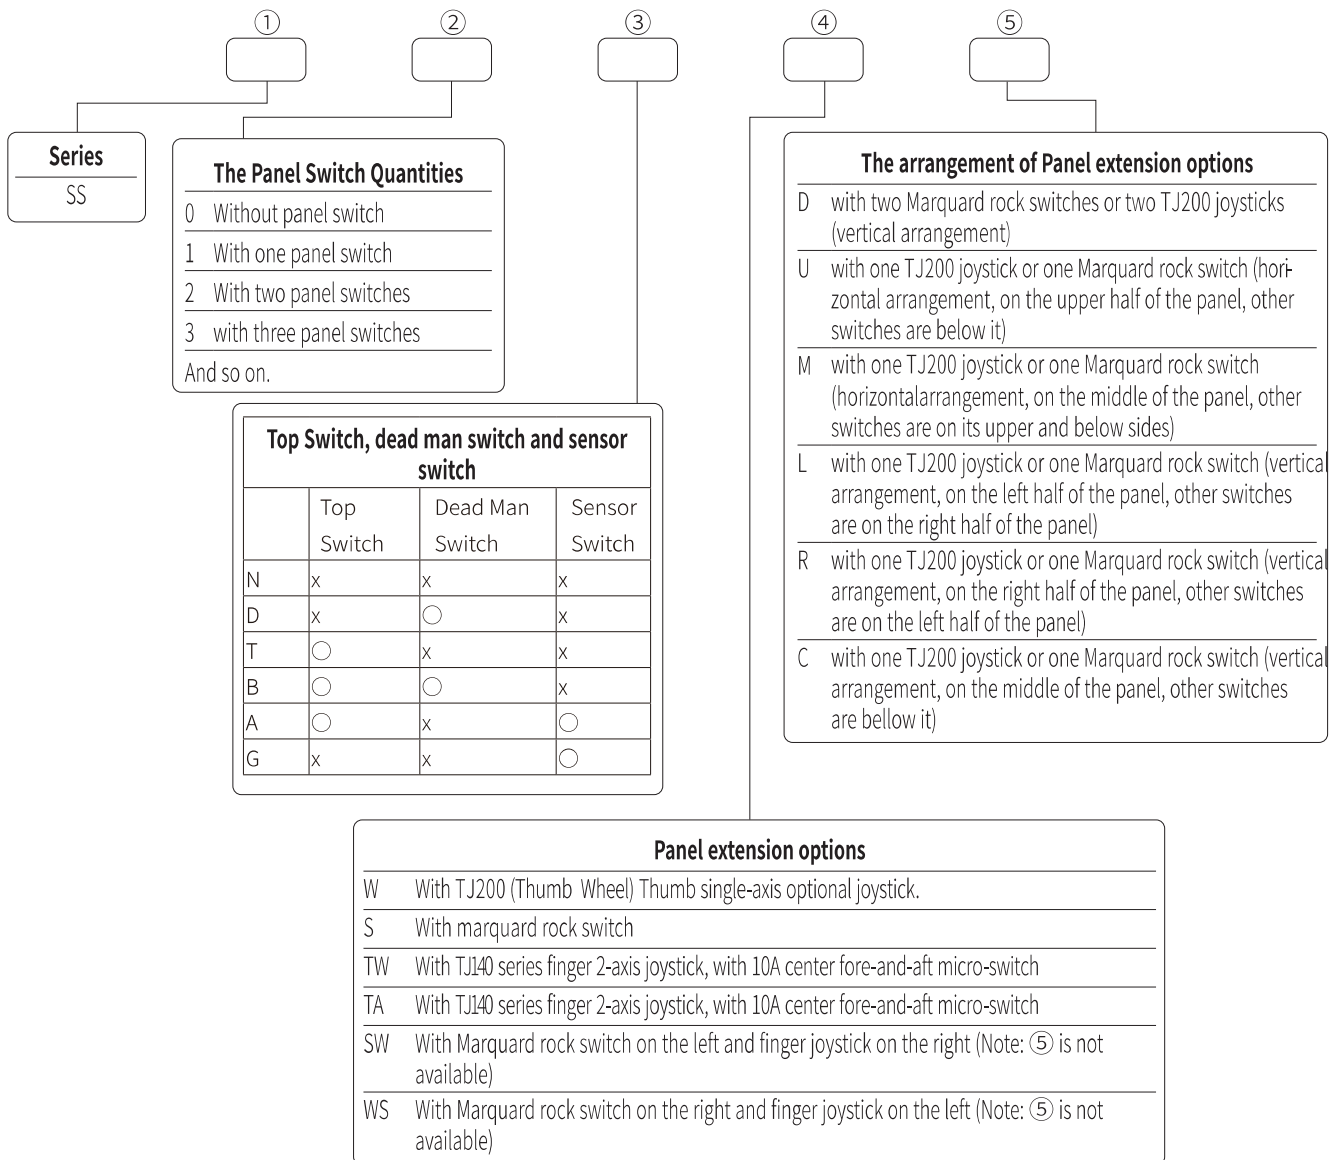

Panel Layout

